

HP RF and Microwave Test Accessories

Waveguide Accessories

Waveguide Accessories

Agilent waveguide products data

Agilent band designation	Frequency range TE ₁₀ mode (GHz)	Waveguide band designator ¹						Other common usage	Materials ¹	Flange designator ¹					
		EIA	IEC	British	JAN	MIL-W-	Materials ¹			MIL-F-	Cover	EIA	MIL-F	Choke	EIA
		WR-()	R-()	WG-()	RG-()/U	85/()				3922/()	JAN	UG-()/U	CMR-()	3922/()	JAN
S	2.6 to 3.95	284	32	10	75	1-041		Alum alloy	56B-002	584	284	61-001	585A	284	
G	3.95 to 5.85	187	48	12	95	1-053	C, H	Alum alloy	57B-001	407	187	62-001	406B	187	
J	5.85 to 8.2	137	70	14	106	1-065	Xn, C, G	Alum alloy	55B-002	441	137	60-002	440B	137	
H	7.05 to 10	112	84	15	51	1-073	Xb, W	Copper alloy	54C-005	51	112	59D-015	522B		
					68	1-072		Alum alloy	54C-006	138	—	59D-016	137B	112	
X	8.2 to 12.4	90	100	16	52	1-079		Copper alloy	54C-007	39	90	59D-013	40B	—	
					67	1-078		Alum alloy	54C-008	135	—	59D-014	136B	90	
M	10 to 15	75	120	17	346	1-085		Copper alloy	70A-004	—	75	59D-010	—	—	
					347	1-084		Alum alloy	70A-005	—	—	—	—	—	
P	12.4 to 18	62	140	18	91	1-089	Ku, Y, U	Copper alloy	70A-007	419	—	59D-001	541A	—	
					349	1-091		Alum alloy	70A-008	—	—	59D-002	—	—	
N	15 to 22	51	180	19	353	1-096		Copper alloy	70A-010	—	—	69D-004	—	—	
					351	1-098		Alum alloy	70A-011	—	—	69D-005	—	—	
K	18 to 26.5	42	220	20	53	1-102		Copper alloy	54C-001	595	—	59D-003	596A	—	
					121	1-104		Alum alloy	54C-002	597	—	59D-004	598A	—	
R	26.5 to 40	28	320	22	96	3-007	V, Ka, U, A	Copper alloy	54C-003	599	—	59D-005	600A	—	
					—	3-009		Alum alloy	—	—	—	—	—	—	
Q	33 to 50	22	400	23	272	3-011		Copper alloy	67B-006	383	—	—	—	—	
					—	3-013		Alum alloy	67B-013	—	—	—	—	—	
U	40 to 60	19	500	24	358	3-015		Copper alloy	67B-007	383 (mod)	—	—	—	—	
					—	—		Alum alloy	—	—	—	—	—	—	
V	50 to 75	15	620	25	273	3-018	M	Copper alloy	67B-002	385	—	—	—	—	
					—	—		Alum alloy	—	—	—	—	—	—	
W	75 to 110	10	900	27	359	3-024		Copper alloy	67B-010	387 (mod)	—	—	—	—	
					—	—		Alum alloy	—	—	—	—	—	—	

¹The waveguide/flange designator is provided to determine interface dimensions and generic material of Agilent products.

Abbreviations

EIA – Electronic Industries Association
 IEC – International Electrotechnical Commission
 JAN – Joint Army Navy

HP RF and Microwave Test Accessories

Waveguide Accessories

Waveguide Accessories


Agilent band designation	Waveguide dimensions						Nom. wall thickness mm (in)	Cutoff frequency (GHz)	Theoretical attenuation low to high frequency (dB/100 ft)	Theoretical peak power rating - low to high frequency megawatts (kw)	Theoretical CW power rating - low to high frequency kilowatts (watts)
	Inside dimensions			Outside dimensions							
	Width mm (in)	Height mm (in)	Tol ± mm (in)	Width mm (in)	Height mm (in)	Tol ± mm (in)					
S	72.14 (2.84)	34.04 (1.34)	0.15 (0.006)	76.20 (3.0)	38.10 (1.5)	0.15 (0.006)	2.03 (0.08)	2.08	0.950 - 0.651	7.645 - 10.85	13.42 - 19.59
G	47.55 (1.872)	22.15 (0.872)	0.13 (0.005)	50.80	25.40 (2.0)	0.13 (1.0)	1.63 (0.005)	3.155 (0.064)	1.785 - 1.238	3.296 - 4.69	5.165 - 7.446
J	34.85 (1.372)	15.80 (0.622)	0.10 (0.004)	38.10 (1.5)	19.05 (0.75)	0.10 (0.004)	1.63 (0.064)	4.285	3.532-1.999	1.975 - 2.53	2.076 - 3.667
H	28.50 (1.122)	12.62 (0.497)	0.10 (0.004)	31.75 (1.250)	15.88 (0.625)	0.10 (0.004)	1.63 (0.064)	5.260	4.114 - 3.197	1.284 - 1.702	1.607 - 2.067
								5.260	4.166 - 3.238	1.284 - 1.702	1.523 - 1.958
X	22.86 (0.900)	10.16 (0.40)	0.10 (0.004)	25.40 (1.0)	12.70 (0.5)	0.10 (0.004)	1.27 (0.05)	6.560	6.424 - 4.445	0.758 - 1.124	0.8621 - 1.246
								6.560	6.506 - 4.502	0.758 - 1.124	0.8169 - 1.180
M	19.05 (0.75)	9.53 (0.375)	0.08 (0.003)	21.59 (0.850)	12.07 (0.475)	0.08 (0.003)	1.27 (0.05)	7.847	7.601 - 5.309	0.622 - 0.903	0.6621 - 0.9479
								7.847	7.698 - 5.377	0.622 - 0.903	0.6273 - 0.8982
P	15.80 (0.622)	7.90 (0.311)	0.06 (0.0025)	17.83 (0.702)	9.93 (0.391)	0.08 (0.003)	1.02 (1.02)	9.490	9.578 - 7.041	0.457 - 0.633	0.4513 - 0.6139
								9.490	9.700 - 7.131	0.457 - 0.633	0.4276 - 0.5816
N	12.95 (0.51)	6.48 (0.255)	0.06 (0.0025)	14.99 (0.59)	8.51 (0.335)	0.08 (0.003)	1.02 (0.04)	11.54	13.08 - 9.477	0.312 - 0.433	0.2899 - 0.4000
								11.54	13.25 - 9.598	0.312 - 0.433	0.2746 - 0.3791
K	10.67 (0.42)	4.32 (0.17)	0.05 (0.002)	12.70 (0.5)	6.35 (0.25)	0.08 (0.003)	1.02 (0.04)	14.08	20.48 - 15.04	0.171 - 0.246	0.1565 - 0.2132
								14.08	20.74 - 15.23	0.171 - 0.246	0.1483 - 0.2020
R	7.11 (0.280)	3.56 (0.14)	0.04 (0.0015)	9.14 (0.36)	5.59 (0.22)	0.05 (0.002)	1.02 (0.04)	21.10	23.02 - 15.77	(96.0 - 146)	(109.7 - 160.1)
								21.10	34.46 - 23.59	(96.0 - 146)	(73.27 - 107.0)
Q	5.69 (0.224)	2.84 (0.112)	0.03 (0.001)	7.72 (0.304)	4.88 (0.192)	0.05 (0.002)	1.02 (0.04)	26.35	32.44 - 22.05	(64.4 - 97.0)	(68.89 - 101.4)
								26.35	48.53 - 32.99	(64.4 - 97.0)	(46.05 - 67.74)
U	4.78 (0.188)	2.39 (0.094)	0.03 (0.001)	6.81 (0.268)	4.42 (0.174)	0.05 (0.002)	1.02 (0.04)	30.69	39.81 - 28.60	(48.0 - 70.0)	(51.32 - 71.43)
								30.69	—	(48.0 - 70.0)	—
V	3.76 (0.148)	1.88 (0.074)	0.03 (0.001)	5.79 (0.228)	3.91 (0.154)	0.05 (0.002)	1.02 (0.04)	39.90	60.25 - 41.17	(30.0 - 40.0)	(30.27 - 44.30)
								39.90	—	(30.0 - 40.0)	—
W	2.54 (0.100)	1.27 (0.05)	0.03 (0.001)	4.57 (0.18)	3.30 (0.13)	0.05 (0.002)	1.02 (0.04)	58.85	105.6 - 74.26	(14.0 - 20.0)	(14.73 - 20.86)
								58.85	—	(14.0 - 20.0)	—

HP RF and Microwave Test Accessories

Waveguide Accessories

Waveguide Accessories

Frequency band data

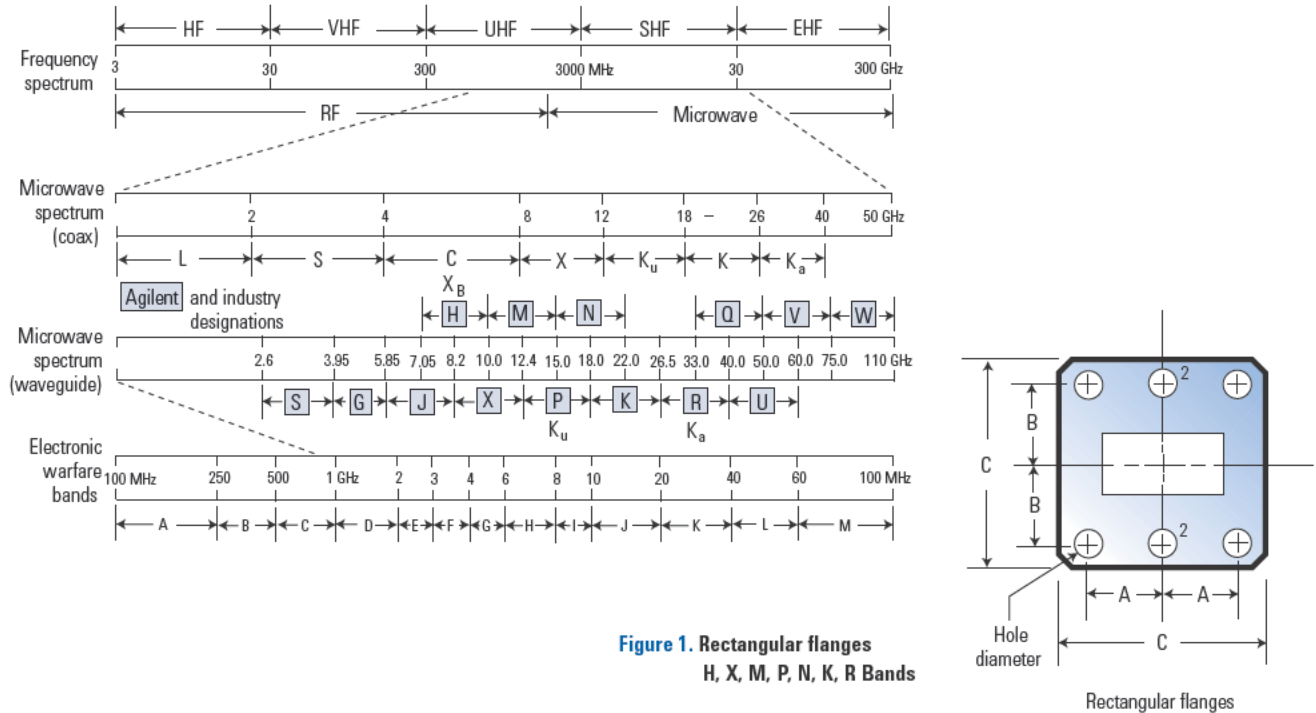

Agilent flange data (7.05 to 40.0 GHz)¹

Agilent band	Waveguide designator		Flange designator			Dimensions mm (in)				
	Frequency range (GHz)	EIA	MIL-W-85/()	Material B: Copper alloy A: Alum. alloy	JAN UG-()/U	MIL-F-3922/()	A	B	C	Hole diameter
H	7.05 to 10	WR-112	1-073	B	51	54C-005	17.2	18.7	47.6	4.3
			1-072	A	138	54C-006	(0.676)	(0.737)	(1.875)	(0.169)
X	8.2 to 12.4	WR-90	1-079	B	39	54C-007	15.5	16.3	41.3	4.3
			1-078	A	135	54C-008	(0.61)	(0.64)	(1.625)	(0.169)
M	10 to 15	WR-75	1-085	B	—	70A-004	13.2	14.2	38.1	3.6
			1-084	A	—	70A-005	(0.52)	(0.561)	(1.50)	(0.14)
P	12.4 to 18	WR-62	1-089	B	419	70A-007	12.6	12.1	33.5	3.7
			1-091	A	—	70A-008	(0.497)	(0.478)	(1.32)	(0.144)
N	15 to 22	WR-51	1-096	B	—	70A-010	10.3	11.3	30.1	3.6
			1-098	A	—	70A-011	(0.405)	(0.443)	(1.187)	(0.14)
K	18 to 26.5	WR-42	1-102	B	595	54C-001	8.1	8.5	22.2	2.9
			1-104	A	597	54C-002	(0.32)	(0.335)	(0.875)	(0.116)
R	26.5 to 40	WR-28	3-007	B	599	54-003	6.35	6.7	19.1	2.9
			3-009	A	—	—	(0.25)	(0.265)	(0.75)	(0.116)

¹ See Figure 1.

² R band only, hole diameter 2.38 mm, -0, + 0.025

